


reduce the walking distance from parking areas to stores. These rear entrances should be attractive, including display windows, etc. (See Major Pedestrian Circulation - 1986 map).

Parking lots should be designed so that pedestrians can walk down driveways, rather than between cars to get to shops.

Shade, benches, and a pleasant atmosphere for walking are needed. When walkway space is ample (fifteen to twenty feet), benches should be added. Variation of pavement materials and the use of raised plant boxes to provide contrast are two of the methods used to achieve attractive walks.

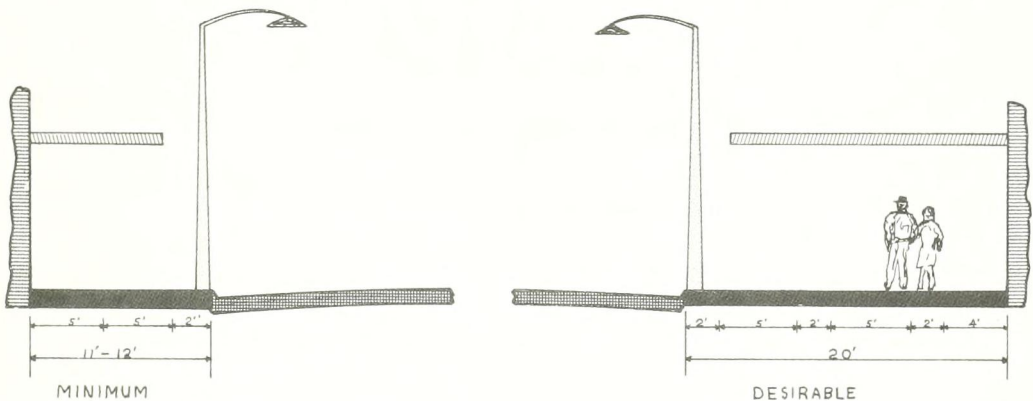

RECOMMENDED MINIMUM WALK CROSS SECTION